




## 1nm Combined lights for vessels (Under 12 Meters)

### 1 NM Combined lights

1nm Comb Sidelight, silver and black w/FB base  
Horizontally mounted with 2,5m cable

Specifications	
Number	1 NM Combined lights
Light Color	Red,Green
Dimensions metric	Ø92,5mm x 58mm
Certification	This Navigation Light is certified by DNV, the Declaration of conformity and the certificates can be found on <a href="http://www.lopolight.com">www.lopolight.com</a> under <a href="#">Support</a>
Dimensions imperial	Ø3.6" x 1.4"
Approved to	COLREG72,EN14744,IEC 60945,IACS E10,USCG,ABS,M.E.D.,DNV,LR
Visibility	1nm
Included In Package	1 Navigation light,precabled with 2.5 meter shielded marine grade cable,Installation guide
Operating temperature	-25°C to 55°C
Mounting	Horizontal
Materials	Silver anodized aluminum 25μ, PMMA lens, A4 stainless steel screws, Epoxy, Polyurethane
Operating Voltage	10-32VDC
EAN	5704438042605
IP rating	IP68
Power draw (W)	1,4
UPC Code	879343042738
Connection	2.5m cable
Current consumption (mA @ 12VDC)	87

Specifications	
Current consumption (mA @ 24VDC)	48
Vessel size	Under 12M
Min. feed wire gauge	0.5mm2 AWG22
Weight (Kg)	0.55 Kg
Weight (Oz)	19.32 Oz

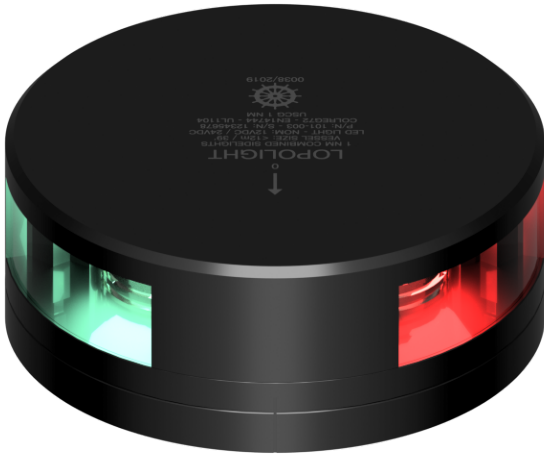

## 1nm 2x112,5° Red/Green Sidelight, black w/FB base

101-003-FB-B

1nm Comb Sidelight, silver and black w/FB base  
Horizontally mounted with 2,5m cable  
FB (flat base) POM mounting system

Specifications	
Number	101-003-FB-B
Light Color	Red,Green
Dimensions metric	Ø92,5mm x 58mm
Certification	This Navigation Light is certified by DNV, the Declaration of conformity and the certificates can be found on <a href="http://www.lopolight.com">www.lopolight.com</a> under <a href="#">Support</a>
Dimensions imperial	Ø3.6" x 1.4"
Approved to	COLREG72,EN14744,IEC 60945,IACS E10,USCG,ABS,M.E.D.,DNV,LR
Visibility	1nm
Included In Package	1 Navigation light,precabled with 2.5 meter shielded marine grade cable,Installation guide
Operating temperature	-25°C to 55°C
Mounting	Horizontal
Materials	Silver anodized aluminum 25μ, PMMA lens, A4 stainless steel screws, Epoxy, Polyurethane
Operating Voltage	10-32VDC
EAN	5704438042612
IP rating	IP68
Power draw (W)	1,4
UPC Code	879343042745
Connection	2.5m cable
Current consumption (mA @ 12VDC)	87

Specifications	
Current consumption (mA @ 24VDC)	48
Vessel size	Under 12M
Min. feed wire gauge	0.5mm2 AWG22
Weight (Kg)	0.55 Kg
Weight (Oz)	19.32 Oz



## 1nm 2x112,5° Red/Green Sidelight, black, vert mnt

101-004-B

1nm Comb Sidelight, silver and black w/FB base  
Vertically mounted with 2,5m cable

Specifications	
Number	101-004-B
Light Color	Red,Green
Dimensions metric	Ø92,5mm x 58mm
Certification	This Navigation Light is certified by DNV, the Declaration of conformity and the certificates can be found on <a href="http://www.lopolight.com/underSupport">www.lopolight.com/underSupport</a>
Dimensions imperial	Ø3.6" x 1.4"
Approved to	COLREG72,EN14744,IEC 60945,IACS E10,USCG,ABS,M.E.D.,DNV,LR
Visibility	1nm
Included In Package	1 Navigation light,precabled with 2.5 meter shielded marine grade cable,Installation guide
Operating temperature	-25°C to 55°C
Mounting	Horizontal
Materials	Silver anodized aluminum 25μ, PMMA lens, A4 stainless steel screws, Epoxy, Polyurethane
Operating Voltage	10-32VDC
EAN	5704438010512
IP rating	IP68
Power draw (W)	1,4
UPC Code	879343010515
Connection	2.5m cable
Current consumption (mA @ 12VDC)	87

Specifications	
Current consumption (mA @ 24VDC)	48
Vessel size	Under 12M
Min. feed wire gauge	0.5mm2 AWG22
Weight (Kg)	0.49 Kg
Weight (Oz)	17.28 Oz



## 1nm 2x112,5° Red/Green Sidelight,silver w/6m cable

101-004-B-SUB 6M

1nm Comb Sidelight, silver and black w/FB base  
Vertically mounted with 6m cable  
Potted under vacuum, submersible light

Specifications	
Number	101-004-B-SUB 6M
Light Color	Red,Green
Dimensions metric	Ø92,5mm x 58mm
Certification	This Navigation Light is certified by DNV, the Declaration of conformity and the certificates can be found on <a href="http://www.lopolight.com">www.lopolight.com</a> under <a href="#">Support</a>
Dimensions imperial	Ø3.6" x 1.4"
Approved to	COLREG72,EN14744,IEC 60945,IACS E10,USCG,ABS,M.E.D.,DNV,LR
Visibility	1nm
Included In Package	1 Navigation light,precabled with 2.5 meter shielded marine grade cable,Installation guide
Operating temperature	-25°C to 55°C
Mounting	Horizontal
Materials	Silver anodized aluminum 25μ, PMMA lens, A4 stainless steel screws, Epoxy, Polyurethane
Operating Voltage	10-32VDC
EAN	5704438016224
IP rating	IP68
Power draw (W)	1,4
UPC Code	879343016234
Connection	2.5m cable
Current consumption (mA @ 12VDC)	87

Specifications	
Current consumption (mA @ 24VDC)	48
Vessel size	Under 12M
Min. feed wire gauge	0.5mm2 AWG22
Weight (Kg)	0.7 Kg
Weight (Oz)	24.69 Oz






## 1nm 2x112,5° Red/Green Sidelight, silver w/FB base

101-003-FB

1nm Comb Sidelight, silver and black w/FB base  
Horizontally mounted with 2,5m cable  
FB (flat base) POM mounting system

Specifications	
Number	101-003-FB
Light Color	Red,Green
Dimensions metric	Ø92,5mm x 58mm
Certification	This Navigation Light is certified by DNV, the Declaration of conformity and the certificates can be found on <a href="http://www.lopolight.com/underSupport">www.lopolight.com/underSupport</a>
Dimensions imperial	Ø3.6" x 1.4"
Approved to	COLREG72,EN14744,IEC 60945,IACS E10,USCG,ABS,M.E.D.,DNV,LR
Visibility	1nm
Included In Package	1 Navigation light,precabled with 2.5 meter shielded marine grade cable,Installation guide
Operating temperature	-25°C to 55°C
Mounting	Horizontal
Materials	Silver anodized aluminum 25μ, PMMA lens, A4 stainless steel screws, Epoxy, Polyurethane
Operating Voltage	10-32VDC
EAN	5704438042605
IP rating	IP68
Power draw (W)	1,4
UPC Code	879343042738
Connection	2.5m cable
Current consumption (mA @ 12VDC)	87

Specifications	
Current consumption (mA @ 24VDC)	48
Vessel size	Under 12M
Min. feed wire gauge	0.5mm2 AWG22
Weight (Kg)	0.55 Kg
Weight (Oz)	19.32 Oz

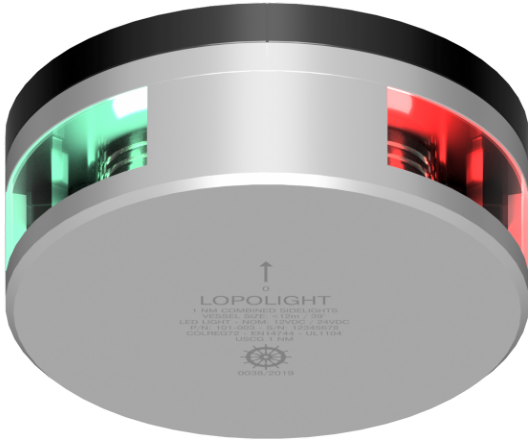

## 1nm 2x112,5° Red/Green - upside-down w/FB base

101-003-FB-REVERSE

1nm Comb Sidelight, silver and black w/FB base  
Horizontally mounted with 2,5m cable  
FB (flat base) POM mounting system

Specifications	
Number	101-003-FB-REVERSE
Light Color	Red,Green
Dimensions metric	Ø92,5mm x 58mm
Certification	This Navigation Light is certified by DNV, the Declaration of conformity and the certificates can be found on <a href="http://www.lopolight.com">www.lopolight.com</a> under <a href="#">Support</a>
Dimensions imperial	Ø3.6" x 1.4"
Approved to	COLREG72,EN14744,IEC 60945,IACS E10,USCG,ABS,M.E.D.,DNV,LR
Visibility	1nm
Included In Package	1 Navigation light,precabled with 2.5 meter shielded marine grade cable,Installation guide
Operating temperature	-25°C to 55°C
Mounting	Horizontal
Materials	Silver anodized aluminum 25µ, PMMA lens, A4 stainless steel screws, Epoxy, Polyurethane
Operating Voltage	10-32VDC
EAN	5704438042629
IP rating	IP68
Power draw (W)	1,4
UPC Code	879343042752
Connection	2.5m cable
Current consumption (mA @ 12VDC)	87

Specifications	
Current consumption (mA @ 24VDC)	48
Vessel size	Under 12M
Min. feed wire gauge	0.5mm2 AWG22
Weight (Kg)	0.55 Kg
Weight (Oz)	19.32 Oz



## 1nm 2x112,5° Red/Green Sidelight, silver, vert mnt

101-004

1nm Comb Sidelight, silver and black w/FB base  
Vertically mounted with 2,5m cable

Specifications	
Number	101-004
Light Color	Red,Green
Dimensions metric	Ø92,5mm x 58mm
Certification	This Navigation Light is certified by DNV, the Declaration of conformity and the certificates can be found on <a href="http://www.lopolight.com/underSupport">www.lopolight.com/underSupport</a>
Dimensions imperial	Ø3.6" x 1.4"
Approved to	COLREG72,EN14744,IEC 60945,IACS E10,USCG,ABS,M.E.D.,DNV,LR
Visibility	1nm
Included In Package	1 Navigation light,precabled with 2.5 meter shielded marine grade cable,Installation guide
Operating temperature	-25°C to 55°C
Mounting	Horizontal
Materials	Silver anodized aluminum 25μ, PMMA lens, A4 stainless steel screws, Epoxy, Polyurethane
Operating Voltage	10-32VDC
EAN	5704438010260
IP rating	IP68
Power draw (W)	1,4
UPC Code	879343010263
Connection	2.5m cable
Current consumption (mA @ 12VDC)	87

Specifications	
Current consumption (mA @ 24VDC)	48
Vessel size	Under 12M
Min. feed wire gauge	0.5mm2 AWG22
Weight (Kg)	0.49 Kg
Weight (Oz)	17.28 Oz